

# TSF: Trajectory-based Statistical Forwarding for Infrastructure-to-Vehicle Data Delivery in Vehicular Networks

Jaehoon Jeong, Shuo Guo, Yu Gu, Tian He and David H.C. Du  
Department of Computer Science & Engineering, University of Minnesota  
Email: {jjeong,sguo,yugu,tianhe,du}@cs.umn.edu

## Abstract

*This paper proposes a data forwarding scheme called Trajectory-based Statistical Forwarding (TSF), tailored for the data delivery from infrastructure nodes (e.g., Internet access points) to moving vehicles in vehicular networks. To our knowledge, this paper presents the first attempt to investigate how to effectively utilize the packet destination vehicle's trajectory for such an infrastructure-to-vehicle data delivery. This data delivery is performed through the computation of a target point based on the destination vehicle's trajectory that is an optimal rendezvous point of the packet and the destination vehicle. TSF forwards packets over multi-hop to a selected target point where the vehicle is expected to pass by. Such a target point is selected optimally to minimize the packet delivery delay while satisfying the required packet delivery probability. The optimality is achieved analytically by utilizing the packet's delivery delay distribution and the destination vehicle's travel delay distribution. Through theoretical analysis and extensive simulation, it is shown that our design provides an efficient data forwarding under a variety of vehicular traffic conditions.*

## 1. Introduction

Vehicular Ad Hoc Networks (VANETs) have recently emerged as one of promising research areas for the driving safety in road networks [1]–[6]. As a result, the IEEE standards association has been working for wireless access in vehicular environments, standardizing Dedicated Short Range Communication (DSRC), such as IEEE 802.11p [7]. In the meantime, the GPS technology has been adopted for navigation purposes at an unprecedented rate. It is expected that approximately 300 million GPS devices will be shipped in 2009 alone [8]. It seems a very timely topic to develop the vehicular networking by integrating the cutting-edge DSRC and GPS technologies. Especially, our work is inspired by this current trend that a huge number of vehicles have started to install GPS-receivers for navigation and are considering DSRC devices for driving safety. The drivers are guided by these GPS-based navigation systems to select better driving paths in terms of the physically shortest path or the vehicular low-density traffic path. Therefore, one natural research question is how to make the most of these GPS-guided driving

paths to improve the performance of vehicular networks.

Let's consider the scenario where Internet Access Points (APs) are sparsely deployed along the roadways in order to provide individual vehicles with customized driving safety information, such as the road condition information (e.g., holes and bumps) and the road prewarning (e.g., accidents). Since the APs have the limited communication coverage, the infrastructure-to-vehicle data delivery is supported using vehicular ad-hoc networks to bridge the APs and the packet destination vehicles. However, due to the dynamic mobility in the road networks, the Disruption Tolerant Networking (DTN) is required for data delivery in vehicular networks [9]. For vehicular DTN, state-of-the-art schemes [2], [10]–[13] have adopted the *carry-and-forward* approach and have demonstrated their effectiveness in the data forwarding from a moving source (e.g., vehicle) to a stationary destination (e.g., AP). However, these schemes are not designed for the reverse data forwarding. This reverse data forwarding is more challenging because the packet destination is moving during the packet delivery. For infrastructure-to-vehicle data delivery, the packet destination position needs to be accurately estimated considering the temporal-and-spatial rendezvous of the packet and the destination vehicle.

To the best of our knowledge, our Trajectory-based Statistical Forwarding (TSF) is the first work to investigate the reverse data forwarding based on the vehicle trajectory guided by GPS-based navigation systems [14]. To ensure the rendezvous of a packet and a destination vehicle, an optimal target point is identified as packet destination position in the road network in order to minimize the packet delivery delay while satisfying the user-required packet delivery probability. In order to search such an optimal target point, our key idea is to use the two delay distributions: (i) the packet delivery delay distribution from the AP to the target point and (ii) the vehicle travel delay distribution from the destination vehicle's current position to the target point. Once the target point is decided, TSF adopts the source routing technique, i.e., forwards the packet using a shortest-delay forwarding path specified by multiple intersections in the target road network.

Our intellectual contributions are as follows:

- A reverse forwarding architecture. We propose a data forwarding architecture for the infrastructure-to-vehicle data delivery. The architecture adopts the stationary nodes (i.e., roadside units) for the reliable delivery.

- The delay modeling for packet and vehicle. With the vehicular traffic statistics, we model the distributions of the link delay and the E2E packet delay. With the destination vehicle's trajectory, we model the distribution of the vehicle travel delay. These models are used for computing an optimal target point.
- An optimal target point selection algorithm. With the packet delay distribution and the vehicle delay distribution, an optimal target point is selected to minimize the packet delivery delay while satisfying the user-required packet delivery probability.

The rest of this paper is organized as follows: Section 2 describes the problem formulation along with the stationary-node-based forwarding architecture. Section 3 explains our optimal target point selection. Section 4 explains the packet delay model and the vehicle delay model for target point computation. Section 5 explains the TSF forwarding protocol. Section 6 evaluates our design. We summarize related work in Section 7 and conclude this paper in Section 8.

## 2. Problem Formulation

In this section, we formulate the data forwarding in vehicular networks as follows: *Given a road network with APs, our goal is to deliver packets reliably from the APs to a moving destination vehicle with a minimum End-to-End delay.*

### 2.1. Assumptions

This work is based on the following set of assumptions on the road network and vehicle settings.

- Stationary nodes are installed as Roadside Unit (RSU) at intersections at the road networks. Intelligent Transportation Systems (ITS) are trying to make it mandatory install RSUs (i) at intersections for the driving safety or (ii) at tollgates for the electronic fee collection through the DSRC communications between RSUs and vehicles called On-Board Unit (OBUs) [15], [16].
- Vehicles as OBUs participating in VANET have a wireless communication device, such as the DSRC device [7]. Nowadays many vehicle vendors, such as GM and Toyota, are planning to release vehicles with DSRC devices [16], [17].
- Target vehicles and stationary nodes are installed with GPS-based navigation systems and digital road maps [14], [18]. Traffic statistics, such as vehicle arrival rate  $\lambda$  and average vehicle speed  $v$  per road segment, are available via a commercial navigation service, similar to the one currently provided by Garmin Ltd [14].
- Target vehicles know their trajectory by themselves and provide it for Internet access points. Such vehicles regularly report their trajectory information to the APs. This report from vehicles to the APs can be performed by the state-of-the-art schemes, such as VADD [2], TBD [11], and SADV [12].

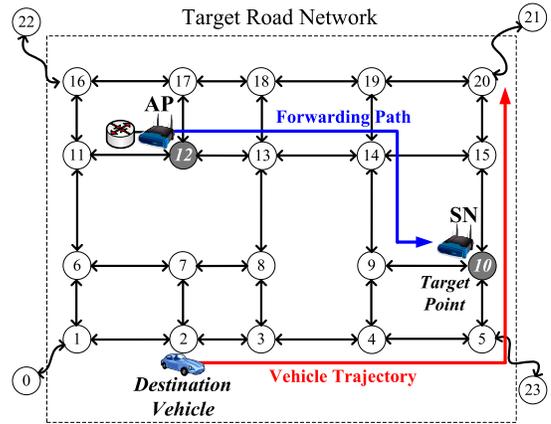


Figure 1. Data Forwarding from AP to Target Point in Road Network

### 2.2. About Stationary-Node-Assisted Forwarding

The data forwarding from vehicle to AP (i.e., fixed destination) has already been researched with a *stochastic model*, such as VADD [2] and TBD [11]. The stochastic model tries to forward packets opportunistically towards the packet destination using *in-situ next carriers* without stationary nodes at intersections. Both VADD [2] and TBD [11] demonstrate the effectiveness of their approaches, mainly because the final destination is a fixed access point. However, forwarding from the AP to the vehicle is a completely different story. The success ratio of reverse data forwarding highly depends on the accuracy of delay estimation, because only *just-in-time* packets can be delivered to a moving vehicle.

To investigate whether we can apply existing infrastructure-free forwarding technique such as VADD [2], we conduct simulations in the road network. As shown in Figure 1, the AP is placed at intersection  $n_{12}$  and the target point is intersection  $n_{10}$ . The AP at  $n_{12}$  generates 5000 packets with the exponential distribution of 1-second interval towards the stationary node at the target point  $n_{10}$ . As shown in the figure, one of possible packet forwarding paths is  $n_{12} \rightarrow n_{13} \rightarrow n_{14} \rightarrow n_9 \rightarrow n_{10}$ .

Table 1. Delay Average Estimation of VADD

Protocol	Expected Delay	Actual Delay	Error
VADD	489.1sec	412.5sec	15.7%

Table 2. Delay Standard Deviation (STD) of VADD

Protocol	Expected STD	Actual STD	Error
VADD	10.1sec	139.2sec	1277.1%

As shown in Table 1 and Table 2, VADD has a very large delay estimation error in that the mean of the expected delivery delay is much different from that of the actual delivery delay. More noticeably, VADD has a standard deviation (STD) estimation error of 1277.1%, a value that makes just-in-time delivery difficult, if not possible. Such a large uncertainty is introduced by stochastic forwarding at the intersection, where a vehicle has to carry the packet along a

wrong direction if no vehicle at intersection moves toward the right direction. In the rest of the paper, we demonstrate such a large uncertainty should and can be removed by requiring stationary nodes at the intersections. Such a requirement can be met by modifying existing roadside units, which have already been mandatory at intersections for driving safety and at tollgates for the electronic fee collection. Note that SADV [12] is an early work to investigate the stationary-node-assisted forwarding in vehicular networks, however, it does not consider the reverse forwarding from APs to moving vehicles.

### 2.3. Concept of Operation in TSF

Figure 1 shows the data packet forwarding from an AP to a destination vehicle. Suppose that as shown in the figure, the destination vehicle has its vehicle trajectory consisting of 7 intersections, that is,  $n_2 \rightarrow n_3 \rightarrow \dots \rightarrow n_{20}$  and has registered its vehicle trajectory into the AP. Our goal is to deliver packets from the AP to the destination vehicle with a short delay. As shown in Figure 1, our delivery strategy is to let the packets arrive earlier at a target point (i.e., intersection  $n_{10}$  on the destination vehicle's trajectory) along the forwarding path for the target point than the destination vehicle. Since there exists a stationary node at the target point, the packets earlier arrived can wait for the destination vehicle. Thus, a target point is determined as *rendezvous point* where the packet is highly expected to meet the destination vehicle with the shortest packet delay. In the next section, we will explain how to determine an optimal target point on the vehicle trajectory.

### 3. Target Point Selection for Data Delivery

In this section, we explain how to select an optimal target point for the data delivery from an AP to a destination vehicle with the packet delay and vehicle delay distributions. The target point selection is based on the *delivery probability* that the packet will arrive earlier than the destination vehicle at the target point. This delivery probability can be computed with the packet's delivery delay distribution and the destination vehicle's travel delay distribution as follows. Let  $I$  be the set of intersections consisting of the destination vehicle's trajectory. Let  $i$  be a target point where  $i \in I$ . Let  $\alpha$  be the user-required delivery probability. Let  $P_i$  be the packet delay that a packet will be delivered from AP to target point  $i$ . Let  $V_i$  be the vehicle delay that the destination vehicle will move from its current position to target point  $i$ . For example, in Figure 1,  $P_{10}$  is the packet delay that a packet will be delivered from AP to target point  $n_{10}$  and  $V_{10}$  is the expected vehicle delay that Destination Vehicle will move from its current position  $n_2$  to target point  $n_{10}$ . Thus, we can compute the delivery probability as  $P[P_i \leq V_i]$ .

Given a user-required delivery probability threshold  $\alpha$ , we select a target point intersection  $i$  with the minimum vehicle movement delay as optimal target point such that  $P[P_i \leq V_i] \geq \alpha$ . Note that the minimum vehicle movement

delay determines the destination vehicle's packet reception delay. More formally, we can select an optimal target point with a minimum delivery delay while satisfying the delivery probability as follows:

$$i^* \leftarrow \arg \min_{i \in I} E[V_i] \quad \text{subject to } P[P_i \leq V_i] \geq \alpha. \quad (1)$$

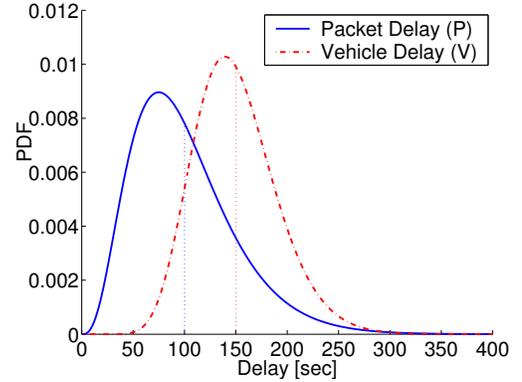


Figure 2. Packet Delay Distribution and Vehicle Delay Distribution

In (1), the delivery probability  $P[P_i \leq V_i]$  is the probability that the packet will arrive earlier at target point  $i$  than the destination vehicle. Figure 2 shows the distribution of packet delay  $P$  and the distribution of vehicle delay  $V$ .

If the vehicular traffic in road networks follows the Poisson arrival model, the distributions of packet delay and vehicle delay follow the Gamma distributions such that  $P \sim \Gamma(\kappa_p, \theta_p)$  and  $V \sim \Gamma(\kappa_v, \theta_v)$  [19]. Note that our model is not restricted to the Poisson arrival model and can accommodate any empirical distributions. That is, if more accurate distributions are available, our model can use them for the computation of the delivery probability. Given that the packet delay distribution and the vehicle delay distribution are independent of each other, the delivery probability  $P[P_i \leq V_i]$  is computed as follows:

$$P[P_i \leq V_i] = \int_0^{TTL} \int_0^v f(p)g(v)dpdv. \quad (2)$$

where  $f(p)$  is the probability density function (PDF) of packet delay  $p$ ,  $g(v)$  is the PDF of vehicle delay  $v$ , and  $TTL$  is the packet's Time-To-Live (TTL); TTL is determined as the destination vehicle trajectory's lifetime that is the destination vehicle's travel time from its current position to its last position on the trajectory. Note that the delivery probability is computed considering the packet's lifetime  $TTL$ ; that is, since the packet is discarded after  $TTL$ , the probability portion is zero after  $TTL$ .

Clearly, the optimal target point selection depends on the packet delay model  $P$  and the vehicle delay model  $V$  which are described in the next section.

### 4. Delay Models

In this section, we describe two types of delay models: (i) Packet delay model and (ii) Vehicle delay model. For

the packet delay model, we first describe the link delay taken for the packet to be delivered over a road segment in Section 4.1 and then the End-to-End (E2E) packet delay from one position to another position on the road network in Section 4.2. For the vehicle delay model, we explain how to construct the vehicle delay distribution from the vehicle's current position to a target point in Section 4.3.

#### 4.1. Link Delay Model

This subsection analyzes the link delay for one road segment with one-way vehicular traffic given the vehicle inter-arrival time, the vehicle speed and the communication range. It is supposed that one stationary node for packet buffering is placed at each end-point (i.e., intersection) of the road segment. We leave the link delay for a two-way road segment as future work.

It should be noted that in the VANET scenarios, the carry delay is *several orders-of-magnitude* longer than the communication delay. For example, a vehicle takes 90 seconds to travel along a road segment of 1 mile with a speed of 40 MPH, however, it takes *only ten of milliseconds* to forward a packet over the same road segment, even after considering the retransmission due to wireless link noise or packet collision; this short retransmission time is because the data rate in DSRC [7] is 6~27 Mbps and transmission range can extend to almost 1,000 meters. Thus, since the carry delay is the dominating part of the total delivery delay, in our analytical model for the link delay we focus on the carry delay for the sake of clarity, although the small communication delay does exist in our design.

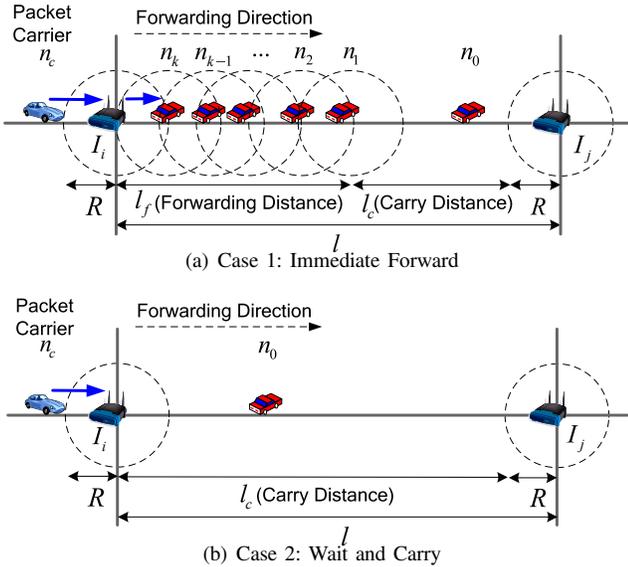


Figure 3. Link Delay Modeling for Road Segment

The link delay for one road segment is computed considering the following two cases for the communication range of the stationary node at intersection  $I_i$  in Figure 3:

- **Case 1: Immediate Forward:** There is at least one vehicle (i.e.,  $k > 0$ ) moving towards the intended

next intersection along the packet's forwarding path. The current *packet carrier*  $n_c$  forwards its packets to the stationary node at Intersection  $I_i$ . As shown in Figure 3(a), The stationary node forwards the packets to vehicle  $n_k$  right away and the packets are forwarded up to vehicle  $n_1$ , that is, by the forwarding distance  $l_f$ , which is the length of the connected ad-hoc network consisting of vehicles  $n_i$  for  $i = 1..k$ . Vehicle  $n_1$  will carry the packets up to the communication range of the stationary node at  $I_j$ , that is, by the carry distance  $l_c$ . Note that the link delay for this case is analyzed in our previous work called *TBD* [11].

- **Case 2: Wait and Carry:** There is no vehicle (i.e.,  $k = 0$ ) moving towards the intended next intersection along the packet's forwarding path. As shown in Figure 3(b), the current *packet carrier*  $n_c$  forwards its packets to the stationary node at Intersection  $I_i$ . The stationary node stores the packets in its local storage until a vehicle moves on the road segment ( $I_i, I_j$ ). The average waiting time is  $1/\lambda$  where the vehicle arrival rate on the road segment ( $I_i, I_j$ ) is  $\lambda$ . After this average waiting, the new packet carrier will carry the packets by the carry distance  $l_c (= l - R)$ .

Thus, we can compute the expectation of the link delay with the link delays of these two cases as follows:

$$d = \begin{cases} \frac{l-l_f-R}{v} & \text{for case 1: immediate forward,} \\ \frac{1}{\lambda} + \frac{l-R}{v} & \text{for case 2: wait and carry.} \end{cases} \quad (3)$$

$$\begin{aligned} E[d] &= E[\text{link delay} \mid \text{forward}] \times P[\text{forward}] \\ &\quad + E[\text{link delay} \mid \text{wait}] \times P[\text{wait}] \\ &= \frac{l-R-E[l_f]}{v} \beta + \left(\frac{1}{\lambda} + \frac{l-R}{v}\right)(1-\beta) \end{aligned} \quad (4)$$

where  $P[\text{forward}] = \beta = 1 - e^{-\frac{\lambda R}{v}}$  and  $P[\text{wait}] = 1 - \beta = e^{-\frac{\lambda R}{v}}$ . Please, refer to Appendix in our technical report [20] for the detailed derivation. Also, in the similar way, we can compute the variance of the link delay as follows:

$$\begin{aligned} \text{Var}[d] &= E[d^2] - (E[d])^2 \\ &= \frac{(l-R)^2 - 2(l-R)E[l_f] + E[l_f^2]}{v^2} \beta \\ &\quad + \left(\frac{1}{\lambda} + \frac{l-R}{v}\right)^2 (1-\beta) \\ &\quad - \left(\frac{l-R-E[l_f]}{v} \beta + \left(\frac{1}{\lambda} + \frac{l-R}{v}\right)(1-\beta)\right)^2. \end{aligned} \quad (5)$$

Please, refer to Appendix in our technical report [20] for the detailed derivation.

Finally, with the mean  $E[d]$  and variance  $\text{Var}[d]$  of the link delay, we model the link delay  $d$  as the Gamma distribution. Note that the Gamma distribution is usually used to model the positive continuous random variable, such as the waiting time and lifetime [19]. Thus, the distribution of the link delay  $d_i$  for the edge  $e_i \in E[G]$  is  $d_i \sim \Gamma(\kappa_i, \theta_i)$  such that  $E[d_i] = \kappa_i \theta_i$  and  $\text{Var}[d_i] = \kappa_i \theta_i^2$  for  $d_i, \kappa_i, \theta_i > 0$  [19]. Since we have the mean and variance of the link delay, that

is,  $E[d_i] = \mu_i$  in (4) and  $Var[d_i] = \sigma_i^2$  in (5), we can compute the parameters  $\theta_i$  and  $\kappa_i$  of the Gamma distribution as follows:

$$\theta_i = \frac{Var[d_i]}{E[d_i]} = \frac{\sigma_i^2}{\mu_i}. \quad (6)$$

In (6), the parameter  $\theta_i$  is computed by dividing the link delay variance by the mean link delay.

$$\kappa_i = \frac{E[d_i]}{\theta_i} = \frac{\mu_i}{\theta_i} = \frac{\mu_i^2}{\sigma_i^2}. \quad (7)$$

In (7), the parameter  $\kappa_i$  is computed by dividing the mean link delay by the parameter  $\theta_i$  in (6).

Up to now, we have modeled the link delay for a directed edge corresponding to a road segment. Next, with the distribution of the link delay for each edge, we can compute the E2E packet delay from the AP to the target point assuming the independence of the link delays for the road segments consisting of the E2E path from the AP to the target point. In the next section, we will construct the distribution of the packet delay from the AP to a target point as the Gamma distribution.

## 4.2. E2E Packet Delay Model

In this subsection, we model the End-to-End Packet Delay from one position to another position in a given road network. As discussed in Section 4.1, the link delay is modeled as the Gamma distribution of  $d_i \sim \Gamma(\kappa_i, \theta_i)$  for edge  $e_i \in E(G)$  in the road network graph  $G$ . Given a forwarding path from AP to a target point, we assume that the link delays of edges consisting of the path are independent. From this assumption, the mean and variance of the E2E packet delay are computed as the sum of the means and the sum of the variances of the link delays along the E2E path, respectively. Assuming that the forwarding path consists of  $N$  edges, the mean and variance of the E2E packet delay distribution can be computed as follows:

$$E[P] = \sum_{i=1}^N E[d_i] = \sum_{i=1}^N \mu_i. \quad (8)$$

$$Var[P] = \sum_{i=1}^N Var[d_i] = \sum_{i=1}^N \sigma_i^2. \quad (9)$$

With (8) and (9), the E2E packet delay distribution can be modeled as  $P \sim \Gamma(\kappa_p, \theta_p)$  such that  $E[P] = \kappa_p \theta_p$  and  $Var[P] = \kappa_p \theta_p^2$  for  $P, \kappa_p, \theta_p > 0$  [19].

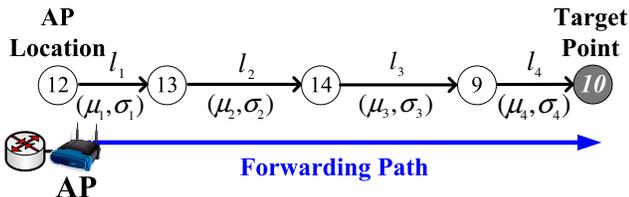


Figure 4. Packet Delay Model from AP to Target Point

For example, as shown in Figure 4, the packet forwarding path is  $n_{12} \rightarrow n_{13} \rightarrow n_{14} \rightarrow n_9 \rightarrow n_{10}$ . The mean and variance for the packet delay distribution can be computed as  $\mu_p = \sum_{i=1}^4 \mu_i$  and  $\sigma_p^2 = \sum_{i=1}^4 \sigma_i^2$ . From these mean  $\mu_p$  and variance  $\sigma_p^2$ , we can compute the parameters  $\theta_p$  and  $\kappa_p$  of the Gamma distribution with Equations (6) and (7).

## 4.3. Vehicle Delay Model

In this subsection, we model the Vehicle Delay from one position to another position in a given road network. Give the road network graph  $G$ , the travel time for edge  $e_i \in E(G)$  is modeled as the Gamma distribution of  $t_i \sim \Gamma(\kappa_i, \theta_i)$ ; note that the travel time distribution for each road segment can be obtained through vehicular traffic measurement and is usually considered the Gamma distribution [21], [22]. The parameters  $\kappa_i$  and  $\theta_i$  of the Gamma distribution are computed with the mean travel time  $\mu_i$  and the travel time variance  $\sigma_i^2$  using the relationship among the mean  $E[t_i]$ , the variance  $Var[t_i]$ ,  $\kappa_i$ , and  $\theta_i$  such that  $E[t_i] = \kappa_i \theta_i$  and  $Var[t_i] = \kappa_i \theta_i^2$  for  $t_i, \kappa_i, \theta_i > 0$  [19] as follows:

$$\theta_i = \frac{Var[t_i]}{E[t_i]} = \frac{\sigma_i^2}{\mu_i}. \quad (10)$$

In (10), the parameter  $\theta_i$  is computed by dividing the travel time variance by the mean travel time.

$$\kappa_i = \frac{E[t_i]}{\theta_i} = \frac{\mu_i}{\theta_i} = \frac{\mu_i^2}{\sigma_i^2}. \quad (11)$$

In (11), the parameter  $\kappa_i$  is computed by dividing the mean travel time by the parameter  $\theta_i$  in (10).

Given a vehicle trajectory from the vehicle's current position to a target point, we suppose that the travel times of edges consisting of the trajectory are independent. Assuming that the trajectory consists of  $M$  edges, in the same way with the Packet Delay Model in Section 4.2, the mean and variance of the vehicle delay distribution can be computed as follows:

$$E[V] = \sum_{i=1}^M E[t_i] = \sum_{i=1}^M \mu_i. \quad (12)$$

$$Var[V] = \sum_{i=1}^M Var[t_i] = \sum_{i=1}^M \sigma_i^2. \quad (13)$$

With (12) and (13), the E2E vehicle delay distribution can be modeled as  $V \sim \Gamma(\kappa_v, \theta_v)$  such that  $E[V] = \kappa_v \theta_v$  and  $Var[V] = \kappa_v \theta_v^2$  for  $V, \kappa_v, \theta_v > 0$  [19].

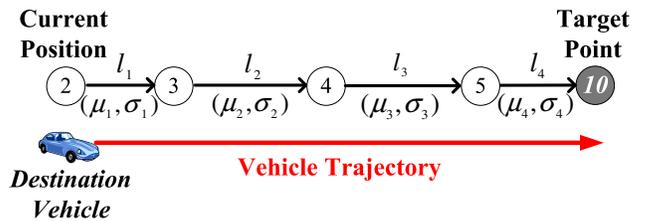


Figure 5. Vehicle Delay Model from Current Position to Target Point

For example, as shown in Figure 5, the vehicle trajectory is  $n_2 \rightarrow n_3 \rightarrow n_4 \rightarrow n_5 \rightarrow n_{10}$ . The mean and variance for the vehicle delay distribution can be computed as  $\mu_v = \sum_{i=1}^4 \mu_i$  and  $\sigma_v^2 = \sum_{i=1}^4 \sigma_i^2$ . From these mean  $\mu_v$  and variance  $\sigma_v^2$ , we can compute the parameters  $\theta_v$  and  $\kappa_v$  of the Gamma distribution with Equations (10) and (11).

So far, we have explained our forwarding design and delay models. In the next section, based on these design and delay models, we will explain our forwarding protocol.

## 5. TSF Protocol

In this section, we explain the protocol of our Trajectory-based Statistical Forwarding (TSF) as two steps: (i) First-Step Forwarding from AP to Target Point (in Section 5.1) and (ii) Second-Step Forwarding from Target Point to Destination Vehicle (in Section 5.2).

For the TSF forwarding protocol, TSF packet contains two important fields: (i) *Forwarding Path* and (ii) *Vehicle Trajectory*. *Forwarding Path* is the list of the intersections for the source routing from AP to the target point. *Vehicle Trajectory* is the destination vehicle's trajectory, that is, the series of intersections on the destination vehicle's trajectory. With this TSF packet, the data packets will be forwarded towards the destination vehicle. Our forwarding protocol consists of the following two steps.

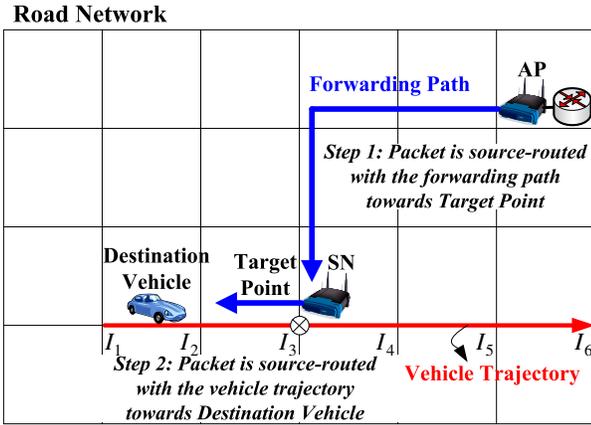


Figure 6. TSF Forwarding Protocol

### 5.1. The First-Step Forwarding from AP to Target Point

The first-step forwarding is to forward a packet through the source routing along the forwarding path. As shown in Figure 6, the forwarding path is the *shortest packet delay path* from AP to the target point  $I_3$  determined by AP with the optimization in (1). For example, as shown in Figure 4, the forwarding path is  $n_{12} \rightarrow n_{13} \rightarrow n_{14} \rightarrow n_9 \rightarrow n_{10}$ . The stationary nodes on the forwarding path are trying to forward the packets to carriers moving towards their neighboring stationary nodes along the forwarding path. In Figure 4, the stationary node at  $n_{12}$  is trying to forward the packets towards the neighboring node  $n_{13}$  on the forwarding path. In this way, the packet will be delivered to the target point, for example,  $n_{10}$  in Figure 4.

### 5.2. The Second-Step Forwarding from Target Point to Destination Vehicle

The second-step forwarding is to forward a packet through the source routing along the reverse path of the vehicle trajectory from the target point towards the destination vehicle. As shown in Figure 6, when the packet arrives at the stationary node corresponding to the target point  $I_3$ , the stationary node will hold the packet until a vehicle passes it. If the vehicle is heading for the next intersection  $I_2$  on the reverse path of  $I_3 \rightarrow I_2 \rightarrow I_1$ , the stationary node at  $I_3$  will forward its packet to the vehicle. Thus, the packet is forwarded along the reverse path of the destination vehicle's trajectory.

The rationale of this reverse-path forwarding is that the optimization for a target point in (1) provides an optimal target point with the minimum packet delivery delay while satisfying the required delivery probability. This indicates that the packet will hit the destination vehicle along the destination vehicle's trajectory if the packet follows the reverse path of the vehicle trajectory. Of course, there is some probability that the packet arrives at the target point later than the destination vehicle. In this case, the packet will not hit the destination vehicle, so will be discarded after its TTL expiration. In the performance evaluation in Section 6, we will show the trade-off between the delivery delay and the delivery ratio according to the user-required delivery probability threshold  $\alpha$ .

## 6. Performance Evaluation

In this section, we evaluate the performance of *TSF*, focusing on our optimal target point selection algorithm. The evaluation setting is as follows:

- **Performance Metrics:** We use (i) *average delivery delay* and (ii) *packet delivery ratio* as the performance metrics.
- **Baselines:** Our work is the first attempt for the reverse data forwarding based on the vehicle trajectory, so we have no other state-of-the-art schemes for comparison. To evaluate our target point selection algorithm, we compare the following two target point selection algorithms: (i) Random Trajectory Point (RTP) and (ii) Last Trajectory Point (LTP). In RTP, an intersection is randomly selected among the intersections consisting of the destination vehicle's trajectory. In LTP, the last intersection on the destination vehicle's trajectory is selected as target point.
- **Parameters:** In the performance evaluation, we investigate the impacts of (i) *Vehicular traffic density*  $N$ , (ii) *Vehicle speed*  $\mu_v$ , (iii) *Vehicle speed deviation*  $\sigma_v$ , and (iv) *Delivery probability threshold*  $\alpha$ .

A road network with 49 intersections is used in the simulation and one Internet access point is deployed in the center of the network. Each vehicle's movement pattern is determined by a *Hybrid Mobility model* of City Section Mobility model [23] and Manhattan Mobility model [24].

Table 3. Simulation Configuration

Parameter	Description
Road network	The number of intersections is 49. The area of the road map is 8.25km×9km (i.e., 5.1263miles×5.5923miles).
Communication range	$R = 200$ meters (i.e., 656 feet).
Number of vehicles ( $N$ )	The number $N$ of vehicles moving within the road network. The default of $N$ is 250.
Time-To-Live ( $TTL$ )	The expiration time of a packet. The default $TTL$ is the vehicle trajectory's lifetime, that is, the vehicle's travel time for the trajectory, i.e., 2,086 seconds.
Vehicle speed ( $v$ )	$v \sim N(\mu_v, \sigma_v)$ where $\mu_v = \{20, 25, \dots, 60\}$ MPH and $\sigma_v = \{1, 2, \dots, 10\}$ MPH. The maximum and minimum speeds are $\mu_v + 3\sigma_v$ and $\mu_v - 3\sigma_v$ , respectively. The default of $(\mu_v, \sigma_v)$ is (40, 5) MPH.
Vehicle travel path length ( $l$ )	Let $d_{u,v}$ be the shortest path distance from start position $u$ to end position $v$ in the road network. $l \sim N(\mu_l, \sigma_l)$ where $\mu_l = d_{u,v}$ km and $\sigma_l = 3$ km (1.86miles).

From the characteristics of City Section Mobility, the vehicles are randomly placed at one intersection as *start position* among the intersections on the road network and randomly select another intersection as *end position*. The vehicles move according to the roadways from their start position to their end position. Also, the vehicles wait for a random waiting time (e.g., uniformly distributed from 0 to 10 seconds) at intersections in order to allow the impact of stop sign or traffic signal. From the characteristics of Manhattan Mobility, as shown in Table 3, the vehicle travel path length  $l$  from start position  $u$  to end position  $v$  is selected from a normal distribution  $N(\mu_l, \sigma_l)$  where  $\mu_l$  is the shortest path distance between these two positions and  $\sigma_l$  determines a random detour distance; this random detour distance reflects that all of the vehicles do not necessarily take the shortest path from their start position and their end position. Once the vehicle arrives at its end position, it pauses during a random waiting time and randomly selects another end position. Thus, this vehicle travel process is repeated during the simulation time, based on the hybrid mobility model. On the other hand, among the vehicles, one vehicle is the destination vehicle, moving around the perimeter of the road network according to its vehicle trajectory. The destination vehicle registers its vehicle trajectory into the APs in the road network, so the APs know the destination vehicle's trajectory all the time.

The vehicle speed is generated from a normal distribution of  $N(\mu_v, \sigma_v)$  [22], [25], as shown in Table 3. The *average vehicle speeds* are used in the vehicle speed distribution to generate vehicle speeds for every two directions per two-way road segment; that is, these two average speeds per road segment can be measured from vehicular traffic by dividing the *road segment length* by the *average travel time* over the road segment. For simplicity, we let all of the road segments have the same speed distribution of  $N(\mu_v, \sigma_v)$  in the road network for the simulation; note that our design can easily extend this simulation setting to having the variety of vehicle speed distributions for road segments.

During the simulation, following an exponential distribution with a mean of 5 seconds, packets are dynamically generated from AP in the road network. Note that this data traffic is low because our target application is the delivery of customized road condition information. The total number of generated packets is 2,000 and the simulation is continued until all of these packets are either delivered or dropped due to TTL expiration. The system parameters are selected based on a typical DSRC scenario [7]. Unless otherwise specified, the default values in Table 3 are used.

### 6.1. Forwarding Behavior Comparison

We compare the forwarding behaviors of *TSF*, *RTP* and *LTP* with the cumulative distribution function (CDF) of the actual packet delivery delays; note that for *TSF*, the delivery probability threshold  $\alpha$  is 95%. From Figure 7, it is very clear that *TSF* has much smaller packet delivery delay than *RTP* and *LTP*. For any given packet delivery delay, *TSF* always has a larger CDF value than both of them before they both reach 100% CDF. For example, *TSF* reaches 75% CDF with a delivery delay of about 765 seconds while the value for *RTP* is about 2,005 seconds and the value for *LTP* is about 2,035 seconds. In other words, on the average packet delivery delay, *TSF* has 1/2 delay of *RTP* and 1/3 delay of *LTP*, respectively. Especially, the CDF of *LTP* starts to increase from 1% at 1,880 seconds and becomes 99% at 2,015 seconds. This CDF is sharply increasing close to the packet TTL (i.e., 2,086 seconds) because the *LTP* chooses the last point on the vehicle trajectory as target point, leading to the long delivery delay. We will show this quantitatively in the following subsections.


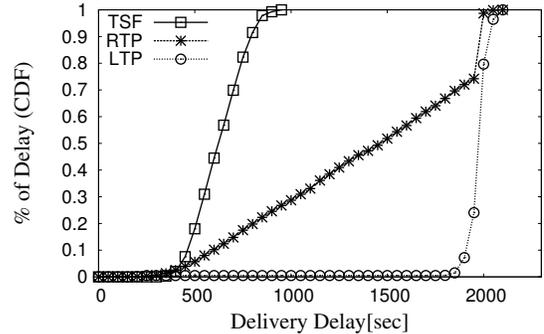



Figure 7. CDF Comparison for Delivery Delay

### 6.2. Impact of Vehicle Number $N$


The number of vehicles in the road network determines the vehicular traffic density in a road network. In this subsection, we intend to study how effectively *TSF* can forward packets from AP towards the destination vehicle using the destination vehicle's trajectory. Through our extensive simulations, we observe that under *any vehicular traffic density*, *TSF* significantly outperforms *RTP* and *LTP* in terms of the packet delivery delay and the packet delivery ratio. Figure 8(a) shows the packet delivery delay comparison among *TSF*, *RTP*

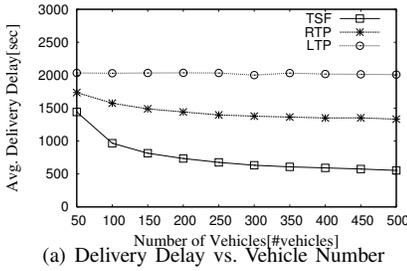


(a) Delivery Delay vs. Vehicle Number

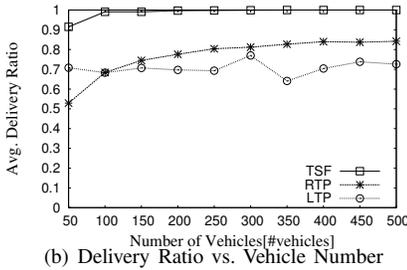


(b) Delivery Ratio vs. Vehicle Number

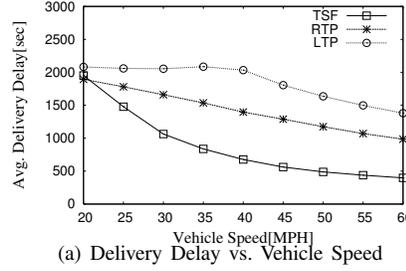


(a) Delivery Delay vs. Vehicle Speed

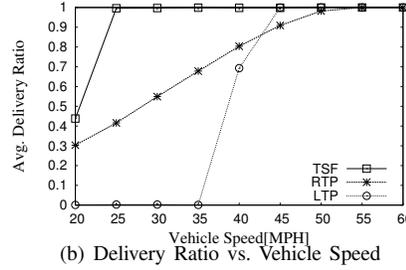

(b) Delivery Ratio vs. Vehicle Speed

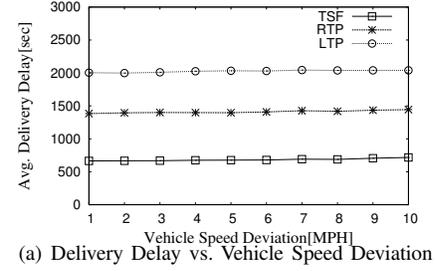

(a) Delivery Delay vs. Vehicle Speed Deviation

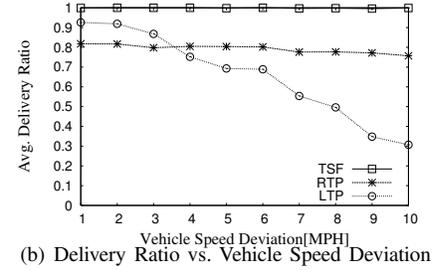

(b) Delivery Ratio vs. Vehicle Speed Deviation

Figure 8. Impact of Vehicle Number  $N$

Figure 9. Impact of Vehicle Speed  $\mu_v$

Figure 10. Impact of Vehicle Speed Deviation  $\sigma_v$

and *LTP* with varying the number of vehicles, that is, from 50 to 500. As shown in Figure 8(a), *TSF* has much smaller packet delivery delay than *RTP* and *LTP* at all vehicular densities. As expected, one trend is that the delivery delays in *TSF*, *RTP* and *LTP* decrease as the number of vehicles increases. This is because the more vehicles increase the forwarding probability among vehicles, so this reduces the carry delay, leading to the overall shorter delivery delay. The smallest delay reduction of *TSF* is 17% at  $N = 50$  for *RTP* and 29% at  $N = 50$  for *LTP*, respectively. On the other hand, the largest delay reduction is 58% at  $N = 500$  for *RTP* and 72% at  $N = 500$  for *LTP*, respectively. From this figure, it can be seen that as the road traffic increases, the trajectory in *TSF* has more contribution to the delivery delay. However, as the traffic density reaches a certain point (e.g.,  $N = 400$ ), the delay of *TSF* does not decrease much. This is because due to the high delivery probability threshold (i.e.,  $\alpha = 95\%$ ), *TSF* selects a target point in a conservative way to satisfy the required delivery probability, leading to a small delay improvement.

Let us compare the delivery ratios among these three schemes. Figure 8(b) shows the delivery ratio for the vehicle number. *TSF* has the highest delivery ratio (i.e., above 91%) at all the range of the vehicle numbers. One thing to note is that *LTP* does not necessarily have a high delivery ratio (i.e., 71% average ratio). As a reminder, *LTP* sends the packet towards the last trajectory point. However, the path from AP to this last point may not be able to deliver the packet to the last point before the destination vehicle arrives at the last point. This is because the path to the target point is selected without considering the delivery probability, so the packet delivery delay to the target point can be longer than the destination vehicle's travel delay. Therefore, with the optimal target point, *TSF* has better performance than *RTP* and *LTP* in terms of two performance metrics. This indicates

the importance of an optimal target point selection for the data delivery.

### 6.3. Impact of Vehicle Speed $\mu_v$

In this subsection, we investigate how the change of mean vehicle speed affects the delivery delay. Figure 9(a) shows the delivery delay under different mean vehicle speeds. As shown in the Figure 9(a), for *TSF*, *RTP* and *LTP*, the higher vehicle speed leads to the shorter delivery delay. This is because the high vehicle speed yields high vehicle arrival rate at each road segment, leading to the shorter delivery delay. However, at all vehicle speeds, the *TSF* still outperforms both *RTP* and *LTP*. For the delivery ratio, as shown in Figure 9(b), the *TSF* has much better performance than the others.

### 6.4. Impact of Vehicle Speed Deviation $\sigma_v$

In this subsection, we investigate the impact of vehicle speed deviation on the performance. We found that under a variety of vehicle speed deviations, *TSF* provides a shorter delay and a more reliable data delivery than both *RTP* and *LTP*. Figure 10(a) illustrates our observation for the delivery delay according to the vehicle speed deviation when the number of vehicles is  $N = 250$ . The delay performance gaps among these three schemes are almost constant at all of the vehicle speed deviations from 1 MPH to 10 MPH. However, for the delivery ratio, as shown in Figure 10(b), *TSF* provides a reliable delivery close to 100%, however the others have worse performance. Especially, *LTP*'s delivery ratio degrades sharply as the vehicle speed deviation increases. This is because under a higher speed deviation, *LTP* can provide less timely delivery to the target point. On the other hand, *TSF* supports the timely delivery to the target point with the delivery probability considering this speed deviation.

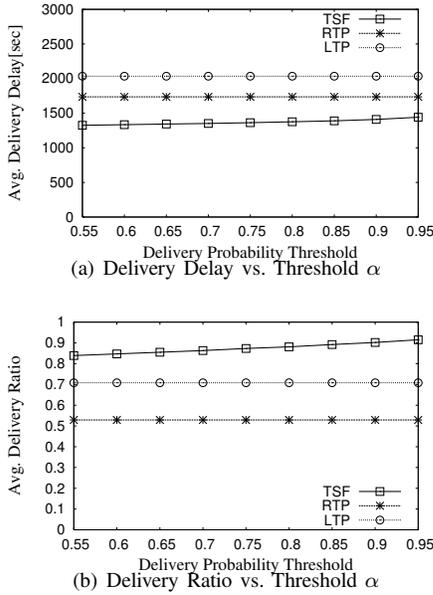


Figure 11. Impact of Delivery Probability Threshold  $\alpha$

### 6.5. Impact of Delivery Probability Threshold $\alpha$

In this subsection, we investigate the impact of the user-required delivery probability threshold  $\alpha$  on both the delivery delay and the delivery ratio. For this investigation, we run three schemes under a light-traffic road network where the number of vehicles is  $N = 50$ .

Figure 11(a) and Figure 11(b) show the delivery delay and the delivery ratio according to  $\alpha$ , respectively. First of all, *RTP* and *LTP* are not affected by the threshold  $\alpha$  because they do not consider the delivery probability in their target point selection. In the delivery delay, as shown in Figure 11(a), *TSF*'s delivery delay increases slightly as  $\alpha$  increases. This is because for a higher  $\alpha$ , *TSF* selects a target point in a more conservative way such that the packet will arrive at the target point earlier than the destination vehicle with a higher probability, so the actual delivery to the destination vehicle can be longer. This conservative way leads to the higher delivery ratio as  $\alpha$  increases, as shown in Figure 11(b). Therefore, there exists a trade-off between the delivery delay and the delivery ratio according to  $\alpha$ . For example, in the interval from  $\alpha = 0.85$  to  $\alpha = 0.95$  in Figure 11, the delivery ratio is getting better, but the delivery delay is getting worse.

Through the performance evaluation, we can conclude (i) that *TSF* is a promising solution for the reliable, efficient infrastructure-to-vehicle data delivery through the optimal target point selection and (ii) that there exists a trade-off between the delivery ratio and the delivery delay according to the user-required delivery probability. Note that for the data forwarding with multiple APs, please refer to our technical report [20] for the detailed design and evaluation.

## 7. Related Work

Recently, the VANET research has put a lot of attentions on the data forwarding and data dissemination for vehicle-

to-vehicle or vehicle-to-infrastructure communications [1]–[6]. The data forwarding in VANET is different from that in the traditional mobile ad-hoc networks (MANETs) [26] for the reasons of (i) vehicles are moving on the physically constrained areas (i.e., roadways), (ii) the moving speed of vehicles is also constrained by the speed limit on the roadways and (iii) the communication shortest paths do not always match the physical shortest paths due to heterogeneous traffic conditions on road segments. These unique characteristics of the road networks open the door of research opportunities for the data forwarding in the VANET. Also, the frequent network partition and merge due to the high mobility of vehicles makes the MANET routing protocols [26] ineffective in the VANET settings [27]. Thus, in order to deal with such a frequent network partition and merge, the *carry-and-forward* approaches are required. Epidemic Routing [10] is an early work to handle this issue through the random pair-wise exchange of data packets among mobile nodes. However, it is designed for two-dimensional open fields, not optimized for the road networks with the confined routes for vehicles.

Data forwarding schemes investigating the layout of road network and vehicular traffic statistics are proposed in *VADD* [2], *Delay-Bounded Routing* [3], and *SADV* [12]. *VADD* investigates the data forwarding using a stochastic model based on vehicular traffic statistics in order to achieve the *lowest delivery delay* from a mobile vehicle to a stationary packet destination. *Delay-Bounded Routing* proposes data forwarding schemes to satisfy the *user-defined delay bound* rather than the *lowest delivery delay*. In addition, it also aims at minimizing the channel utilization in terms of the number of packet transmissions. In *SADV* [12], authors also propose a forwarding strategy which leverages on the stationary nodes in the network. For all those existing approaches, they focus on the data forwarding from vehicles to a fixed destination, such as Internet access point (AP).

With increasingly popular usage of GPS devices, *vehicle trajectory information* has become a new valuable input for effective data forwarding schemes. Our earlier work *TBD* [11] utilizes such vehicle trajectory information along with vehicular traffic statistics to further improve communication delay and delivery probability for vehicle-to-static-destination communications. In this paper, we take a step further and provide an efficient solution for forwarding messages from a fixed destination (i.e., AP) to a mobile node (i.e., vehicle) using the trajectory of the mobile destination.

## 8. Conclusion

In this paper, we propose a Trajectory-based Statistical Forwarding (*TSF*) in vehicular networks, where the carry delay is the dominating factor for the End-to-End delivery delay. Our goal is to provide a reliable, efficient infrastructure-to-vehicle data delivery by minimizing the packet delivery delay subject to the required delivery probability. This goal is achieved by computing an optimal target point as *packet-and-vehicle-rendezvous-point* with the vehicle delay distribution

and the packet delay distribution, which can be obtained from the vehicle trajectory and the vehicular traffic statistics, respectively. Once an optimal target point is determined, through the shortest-delivery-delay path from the AP to the mobile destination, packets are source-routed towards the packet destination.

With the increasing popularity of GPS-based navigation systems and DSRC communication devices, we believe that our forwarding scheme opens the first door for exploiting the potential benefits of the vehicle trajectory for the infrastructure-to-vehicle delivery of road environment conditions for the driving safety in vehicular networks. As future work, we will explore the impact of the partial deployment of stationary nodes on the performance and develop solutions to deal with such a setting.

## Acknowledgment

This research is supported in part by NSF grants CNS-0917097/0845994/0720465. We also receive the facility support from MSI and DTC at the University of Minnesota.

## References

- [1] V. Naumov and T. R. Gross, "Connectivity-Aware Routing (CAR) in Vehicular Ad Hoc Networks," in *INFOCOM*. IEEE, May 2007.
- [2] J. Zhao and G. Cao, "VADD: Vehicle-Assisted Data Delivery in Vehicular Ad Hoc Networks," *IEEE Transactions on Vehicular Technology*, vol. 57, no. 3, pp. 1910–1922, May 2008.
- [3] A. Skordylis and N. Trigoni, "Delay-bounded Routing in Vehicular Ad-hoc Networks," in *MOBIHOC*. ACM, May 2008.
- [4] J. Ott and D. Kutscher, "Drive-thru Internet: IEEE 802.11b For "Automobile" Users," in *INFOCOM*. IEEE, Mar. 2004.
- [5] J. Eriksson, H. Balakrishnan, and S. Madden, "Cabernet: Vehicular Content Delivery Using WiFi," in *MOBICOM*. ACM, Sep. 2008.
- [6] V. Bychkovsky, B. Hull, A. Miu, H. Balakrishnan, and S. Madden, "A Measurement Study of Vehicular Internet Access Using In Situ Wi-Fi Networks," in *MOBICOM*. ACM, Sep. 2006.
- [7] A. Carter, "The Status of Vehicle-to-Vehicle Communication as a Means of Improving Crash Prevention Performance," Tech. Rep. 05-0264, 2005, <http://www-nrd.nhtsa.dot.gov/pdf/nrd-01/esv/esv19/05-0264-W.pdf>.
- [8] H. Yomogita, "Mobile GPS Accelerates Chip Development," <http://techon.nikkeibp.co.jp/article/HONSHI/20070424/131605/>.
- [9] J. Burgess, B. Gallagher, D. Jensen, and B. N. Levine, "MaxProp: Routing for Vehicle-Based Disruption-Tolerant Networks," in *INFOCOM*. IEEE, Apr. 2006.
- [10] A. Vahdat and D. Becker, "Epidemic Routing for Partially-connected Ad Hoc Networks," Tech. Rep., 2000, <http://www.cs.duke.edu/~vahdat/ps/epidemic.pdf>.
- [11] J. Jeong, S. Guo, Y. Gu, T. He, and D. Du, "TBD: Trajectory-Based Data Forwarding for Light-Traffic Vehicular Networks," in *ICDCS*. IEEE, Jun. 2009.
- [12] Y. Ding, C. Wang, and L. Xiao, "A Static-Node Assisted Adaptive Routing Protocol in Vehicular Networks," in *VANET*. ACM, Sep. 2007.
- [13] L. Pelusi, A. Passarella, and M. Conti, "Opportunistic Networking: Data Forwarding in Disconnected Mobile Ad Hoc Networks," *IEEE Communications Magazine*, vol. 44, no. 11, pp. 134–141, Nov. 2006.
- [14] Garmin Ltd., "Garmin Traffic," <http://www8.garmin.com/traffic/>.
- [15] ETSI, "DSRC Standardization," <http://www.etsi.org/WebSite/Technologies/DSRC.aspx>.
- [16] Toyota Motor Corporation (TMC), "TMC Develops Onboard DSRC Unit to Improve Traffic Safety," <http://www2.toyota.co.jp/en/news/09/09/0903.html>.
- [17] General Motors (GM), "Vehicle-to-Vehicle (V2V) Communications," <http://www.gm.com/experience/technology/research/overview/isl/vcim.jsp>.
- [18] Savari Networks, "StreetWAVE: Roadside Unit," <http://www.savarinetworks.com/files/StreetWAVE-DS-final.pdf>.
- [19] M. DeGroot and M. Schervish, *Probability and Statistics (3rd Edition)*. Addison-Wesley, 2001.
- [20] J. Jeong, S. Guo, Y. Gu, T. He, and D. Du, "TSF: Trajectory-based Statistical Forwarding for Infrastructure-to-Vehicle Data Delivery in Vehicular Networks," Tech. Rep. 10-007, Mar. 2010, [http://www.cs.umn.edu/tech\\_reports\\_upload/tr2010/10-007.pdf](http://www.cs.umn.edu/tech_reports_upload/tr2010/10-007.pdf).
- [21] A. Polus, "A Study of Travel Time and Reliability on Arterial Routes," *Transportation*, vol. 8, no. 2, pp. 141–151, Jun. 1979.
- [22] D. S. Berry and D. M. Belmont, "Distribution of Vehicle Speeds and Travel Times," in *Proceedings of the Second Berkeley Symposium on Mathematical Statistics and Probability*, Jul. 1950.
- [23] T. Camp, J. Boleng, and V. Davies, "A Survey of Mobility Models for Ad Hoc Network Research," *Wireless Communications and Mobility Computing (WCMC): Special Issue on Mobile Ad Hoc Networking: Research, Trends and Applications*, vol. 2, pp. 483–502, Aug. 2002.
- [24] F. Bai, N. Sadagopan, and A. Helmy, "IMPORTANT: A framework to systematically analyze the Impact of Mobility on Performance of Routing protocols for Adhoc Networks," in *INFOCOM*. IEEE, Mar. 2003.
- [25] V. Muchuruza and R. Mussa, "Traffic Operation and Safety Analyses of Minimum Speed Limits on Florida Rural Interstate Highways," in *Proceedings of the 2005 Mid-Continent Transportation Research Symposium*, Ames, Iowa, USA, Aug. 2005.
- [26] E. M. Royer and C.-K. Toh, "A Review of Current Routing Protocols for Ad-hoc Mobile Wireless Networks," *IEEE Personal Communications*, vol. 6, no. 2, pp. 46–55, Apr. 1999.
- [27] N. Wisitpongphan, F. Bai, P. Mudalige, and O. K. Tonguz, "On the Routing Problem in Disconnected Vehicular Ad Hoc Networks," in *INFOCOM Mini-symposia*. IEEE, May 2007.